

Overview

Powered by Microsoft Windows CE.Net, the WTC-600 provides cost-effective and secure access to applications residing on an iSeries or pSeries host, and/or Microsoft Windows, Unix, or Citrix servers.

Unlike other CE.Net-based Thin Clients, which support only full-screen applications, the WTC-600 allows management of multiple browser windows within a single browser instance. As a result, even pop-up windows (which typically require the user to close the new window in order to revert to the parent window) are no longer a distraction to the standard user's workflow. This capability, alongside unique 5250 split screen support (a first for CE.Net implementations), provides users with more flexibility and increased productivity.

Advantages

- Fast processor gives this entry-level Thin Client the benefit of excellent performance in an economical solution
- Windows CE.Net operating system with embedded Internet Explorer 6.0 compact browser to access web-based applications — with window manager, web mail icon, and kiosk mode
- PCI compliant embedded GUI TN5250e/TN3270e terminal emulation display (up to four sessions) and SCS printing, as well as the following ASCII emulations: VT100, VT220, VT400, SCO, Xterm R6, and Telnet with SSH
- Supports connection to Windows Terminal Servers and Citrix servers using the Remote Desktop Protocol (RDP), Citrix Independent Computing Architecture (ICA) client software, Citrix Web Client, Tarantella, Propalms and VNC Client
- Automatic 5250 session termination on power-down, preventing "session in use" problems normally associated with Ethernet terminals
- Support for touch screen and USB printing
- Optional internal 802.11 b/g wireless.
- Contains full array of embedded applications such as Word, Excel and PowerPoint viewers; POP-3 e-mail; media player; and a PDF reader
- GUI setup and centralized configuration, management, and security via the 10ZiG Remote Management utility for low TCO (Total Cost of Ownership)




The 10ZiG WTC-600 supports one parallel printer port, two serial ports, four USB 2.0 ports, two PS/2 ports, 10/100 base-T Ethernet interface, and audio.

Enterprise Class Remote Administration

The WTC-600 Thin Client is simple to configure either locally or remotely using the 10ZiG Management Software, which enables the following tasks:

- Complete terminal configuration from a central location
- User lock-out from configuration changes
- Scheduling of firmware updates
- Cloning of user environments
- Control over which applications run on a particular terminal

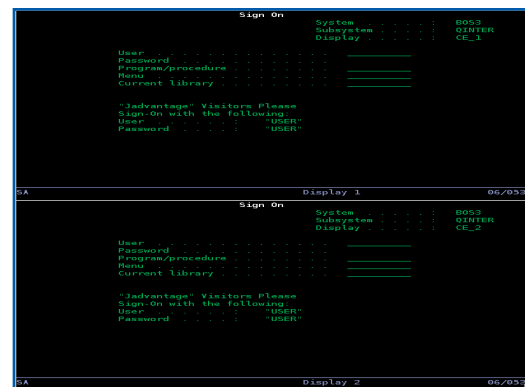

The WTC-600 supports 5250 split screen allowing use of two full sessions at the same time without the normal full screen hot keying associated with other CE.Net devices.

Options

Part Number	7620
Standard Flash/Ram	128MB/256MB
Standard Client Software	
ICA	Version 9
Web Interface	Web Client (NFuse)
RDP	5.5
Host Access	Supports 8 TN5250e and TN370e sessions, Telnet with SSH, SSL, Wyse 60, VT100 and VT200, x-Term, and Optional SCO
Browser	IE6 CE Version
Proprietary	•
Video	8X AGP
Maximum Video Resolution and Refresh Rate	
@ 8-Bit Color	Up to 1280x1024 @ 75 Hz Up to 1024x768 @ 85 Hz
@16-Bit Color	Up to 1280x1024 @ 75 Hz Up to 1024x768 @ 85 Hz
@24-Bit Color	Up to 1280x1024 @ 75 Hz Up to 1600x1200 @ 60 Hz

Software Configuration

Operating System	CE.Net 5.0
Security Features	Read-only file system, locked-down user account, administrative passwords
Client Software	
Citrix ICA	•
Secure Gateway	•
VNC Shadowing	•
BOSmanager	•
ThinPrint	•
Special Features	Autostart/auto-restart connection, multiple level lock-down user interface

Management

10ZiG Management Software	•
Push/Pull Updates	•
VNC	•
Software/Configuration Cloning	•

Hardware Configuration

Form Factor	Compact stand-alone metal case
CPU	VIA Eden 600MHz
Audio	
Mic In/Line Out	•
Internal Speaker	•
Networking	Autosensing, 10/100 Ethernet, RJ-45, WakeOnLAN, PXE boot, USB 802.11g support
I/O and Expansion	
Serial Port – D-Sub 9-Pin Male Connector	2
Parallel Port – D-Sub 25-Pin Female Conn.	1
USB Ports – Type 2	4
PS/2 Ports	1 Keyboard/1 Mouse
Physical Specifications	
Dimensions	1.75" W x 9.5" H x 9.0" D 4.3 mm x 24.8 mm x 22.3 mm
Shipping Weight	6.2 lbs.
Environmental	
Operating Temperature	32-104° F (0-40° C)
Operating Humidity	20-90% non-condensing
Operating Altitude	0-20,000 ft (0-6,096 m)
Power Requirements	100-240 VAC, 50-60 Hz Max AC Input Power: 30 W
Safety Certifications	UL, UL1950, FCC Class B, cUL, CSA-C22.2, No. 950-M89, CE Mark; EMC/LVD, TUV-GS
Security	Kensington Security Lock Slot

Ordering Information

PID	Description
7620	WTC-600 with 5250/3270, CE.Net, IE 6, RDP, ICA, Office Viewers, PDF Reader, POP3
8122x	122-key 5250/PC Keyboard, Driverless (x = 'B' for Black or 'W' for White)
8104x	104-Key PC Keyboard (x = 'B' for Black, 'W' for White)
9009	Internal Mini PCI b/g Wireless adapter

