

4648q Series Zero Clients

Model Numbers: 4648qv, 4648qc, 4648qm

Industry Leading Endpoints & Management for VDI

The 10ZiG 4648q Series is an ultra-compact entry-level value class model, ideal for task or business workers. Its space-saving design is perfect for remote set-ups like working from home. The fanless, Quad Core build is equipped with either an Intel Braswell or Celeron processor with HD graphics. Supportive of VMware, Citrix, Microsoft, and more. Equipped with free centralized management via The 10ZiG Manager™, which comes cloud-enabled with unlimited user licenses. Covered by a 3-Year Advance Warranty, technical support, and software upgrades. Also available in a Thin Client device.




▶ Intel Braswell x5-E8000 Quad Core 1.04GHz (2.0GHz Burst) Intel Celeron N3160 Quad Core 1.60GHz (2.24GHz Burst)
▶ 2 x DisplayPort (3840 x 2160) @ 30Hz
▶ 2 x USB Port 2.0, 2 x USB Port 3.0
▶ RJ45 LAN
▶ TAA Compliant
▶ Optional Wireless (Dual External Antenna)
▶ Support VESA Mount and Kensington Lock
▶ FREE Centralized Management via The 10ZiG Manager™

4648q Series Zero Clients



System	
Management	The 10ZiG Manager™
Processor	Intel Braswell x5-E8000 Quad Core 1.04GHz (2.0GHz Burst) Intel Celeron N3160 Quad Core 1.60GHz (2.24GHz Burst)
Processor Graphics	Intel HD Graphics
Dimensions	
Device	4.9" (D) x 5.1" (W) x 1.3" (H) in.
Weight	1.98 lbs. (0.9 kg.)
Connections	
Ports on Device	2 x DisplayPort, 2 x USB Port 3.0, 2 x USB Port 2.0, 1 x Mic-In, 1 x Line-Out, 1 x DC Jack
Video Resolution	2 x (3840 x 2160) @ 30Hz
Networking	
Wireless	Optional (802.11 a/b/g/n/ac External Antenna)
Ethernet	10/100/1000 Base-T, RJ45 LAN
Environmental	
Operating Temp.	32° - 95° F (0° - 35° C), 20-80% non-condensing humidity

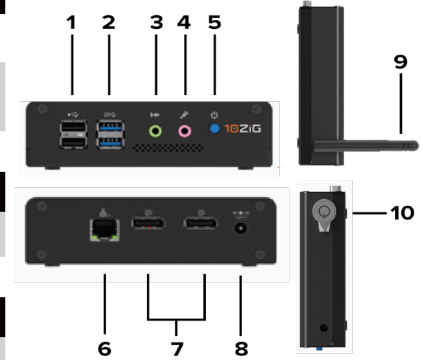

SPECIFICATIONS

1. USB 2.0
2. USB 3.0
3. Mic-In
4. Line-Out
5. Power Button
6. RJ45 LAN
7. DisplayPort
8. DC Jack
9. Antenna Hole
10. Kensington Lock Slot

	<u>VMware</u>	<u>Citrix</u>	<u>Microsoft</u>
	4648qv	4648qc	4648qm
Operating System	NOS™ (Zero)	NOS™ (Zero)	NOS™ (Zero)
Memory (RAM)	Std: 2GB Max: 8GB	Std: 2GB Max: 8GB	Std: 2GB Max: 8GB
Supported Protocols	Blast Extreme, PCoIP, RDP	Citrix ICA and EDT (HDX)	Azure Virtual Desktop (Formerly Windows Virtual Desktop), RDP
Connection Server	Horizon, Workspace One, Horizon Security Server, Unified Access Gateway	Storefront, Netscaler, Citrix Cloud	Direct RDP, RD Gateway, RD Load Balancer, RD Web

Note: Actual display performance, such as multi-monitor and higher resolutions including 4K/UHD/QHD/WQHD are dependent upon your current VDI infrastructure and any additional requirements. Consult with 10ZiG for further guidance and model recommendation.



Americas P: +1 (866) 865-5250 E: info@10ZiG.com
 EMEA P: +44 (0) 116 214 8650 E: info@10ZiG.eu
 APAC P: +61 2 80027421 E: info@10ZiG.com.au
 DE P: +49 (0) 6724 9304-45 E: vertrieb@10zig.de

W: www.10ZiG.com

