

5948q Series Zero Clients

Model Numbers: 5948qv, 5948qc, 5948qm

Industry Leading Endpoints & Management for VDI

The 5948q Series fully supports a triple-monitor 4K UHD setup at the absolute highest performance levels. The impressive 3840 x 2160 @ 30Hz / 2560 x 1600 @ 60Hz support allows for a maximum of three simultaneous displays, including an in-demand 2 x DisplayPort and 1 x HDMI combination, and features a rotating "ports-on-foot" stand. Equipped with free centralized management via The 10ZiG Manager™, which comes cloud-enabled with unlimited user licenses. Covered by a 3-Year Advance Warranty, technical support, and software upgrades. Also available in a Thin Client device.




- ▶ Intel Pentium Quad Core N3710 1.6GHz (2.56GHz Burst)
- ▶ 2 x DisplayPort and 1 x HDMI Combination
- ▶ 2 x USB Port 3.0, 5 x USB Port 2.0
- ▶ RJ45 LAN
- ▶ Optional TPM 2.0
- ▶ Optional TAA Compliant
- ▶ Optional Wireless (External Antenna)
- ▶ Support VESA Mount and Kensington Lock
- ▶ FREE Centralized Management via The 10ZiG Manager™

5948q Series Zero Clients



System	
Management	The 10ZiG Manager™
Form Factor	Mini
Processor	Intel Pentium Quad Core N3710 1.6GHz (2.56GHz Burst)
Processor Graphics	Intel HD Graphics 400
Dimensions	
Device	5.8" (D) x 1.9" (W) x 7.5" (H) in.
Weight	1.98 lbs. (0.9 kg.)
Connections	
Ports on Device	2 x DisplayPort, 1 x HDMI, 2 x USB Port 3.0, 5 x USB Port 2.0, 1 x Mic-In, 1 x Line-Out, 1 x RJ45 LAN, 1 x DC Jack
Video Resolution	3840 x 2160 @ 30Hz / 2560 x 1600 @ 60Hz (3 monitors at 4K UHD)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac External Antenna)
Ethernet	10/100/1000 Base-T, RJ45 LAN / POE: IEEE 802.3af / IEEE 802.3at
Environmental	
Operating Temp.	32° - 95°F (0° - 35°C), 20-80% non-condensing humidity

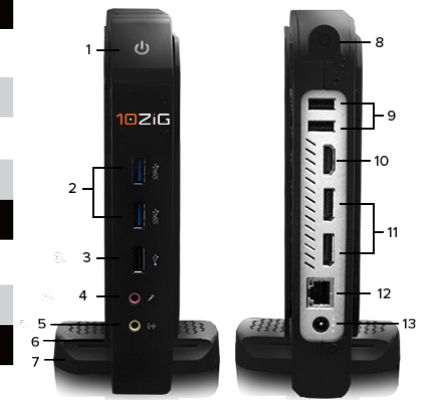

SPECIFICATIONS

1. Power Button
2. USB 3.0 (2)
3. USB 2.0
4. Mic-In
5. Line-Out
6. Kensington Lock Slot
7. USB 2.0
8. Antenna Hole
9. USB 2.0
10. HDMI Port
11. DisplayPort (2)
12. RJ45 LAN
13. DC Jack

	<u>VMware</u>	<u>Citrix</u>	<u>Microsoft</u>
	5948qv	5948qc	5948qm
Operating System	NOS™ (Zero)	NOS™ (Zero)	NOS™ (Zero)
Memory (RAM)	Std: 4GB Max: 8GB	Std: 4GB Max: 8GB	Std: 4GB Max: 8GB
Supported Protocols	Blast Extreme, PCoIP, RDP	Citrix ICA and EDT (HDX)	Windows Virtual Desktop, RDP
Connection Server	Horizon, Workspace One, Horizon Security Server, Unified Access Gateway	Storefront, Netscaler, Citrix Cloud	Direct RDP, RD Gateway, RD Load Balancer, RD Web

Note: 4K performance dependent upon your current VDI Infrastructure and the necessary minimum requirements to support it.