

4448 Series Zero Clients Value Class

Model Numbers: 4448v, 4448c, 4448r, 4448p

Industry Leading VDI Performance

The 10ZiG 4448 NOS™ Series Zero Client is our entry level value class model which is ideal for any task or business worker. Running on an Intel 1.33 GHz Dual Core Processor, the 4448 Series has more than enough power to drive a dual monitor configuration as well as having the ability to run multiple applications at the same time. This is the most economical, energy, and space-saving endpoint 10ZiG offers while still providing high-performance multimedia acceleration.

The 10ZiG 4448 NOS™ Series Zero Client is available as a Citrix, VMware, Parallels RAS or RDP Zero Client and has the ability to transform between all solutions with a simple firmware upgrade. The 4448 NOS™ Series Zero Client is VMware PCoIP and Blast Extreme Ready, and Citrix HDX Certified.




- ▶ Intel 1.33 GHz Dual Core Processor
- ▶ 1 x DVI-D & 1 x DVI-I
- ▶ 4 x USB Ports (1 x USB 3.0)
- ▶ DoD SIPRNet CAC Token Support for External USB DoD CAC Readers
- ▶ Optional Wireless
- ▶ Optional VESA Mounting
- ▶ 802.1x Network Authentication
- ▶ FREE Endpoint Management via The 10ZiG Manager™

4448 Series Zero Clients



System	
Management	10ZiG Manager
Form Factor	Ultra Mini
Processor	Intel Dual Core 1.33 GHz
Processor Graphics	Intel HD Graphics
Dimensions	
Device	4.7"(D) x 1.4"(W) x 6.1"(H) - 120mm x 35mm x 155mm
Weight	1.5 lbs (0.68kg)
Connections	
Ports	3 x USB 2.0, 1 x USB 3.0, 1 x Mic In, 1 x Line Out, RJ-45 LAN, 1 x DC Jack
Video/Resolution	1920 x 1200, 1 x DVI-D, 1 x DVI-I (VGA Supported with Included Adapter)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac External Antenna)
Ethernet	10/100/1000 Base-T
Environmental	
Operating Temp.	32°- 95°F (0°-35°C), 20-80% non-condensing humidity
Power	4-4.5 Average Watt Consumption, 24 Watt, DC-12V/3A External Power Adapter

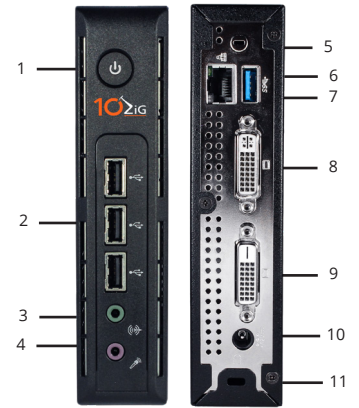

SPECIFICATIONS

1. Power Button/Power HDD LED
2. USB 2.0 (3)
3. Line Out
4. Mic In
5. Extend Antenna
6. USB 3.0 (1)
7. RJ45 LAN port
8. DVI-I
9. DVI-D
10. DC Jack
11. Kensington Lock

	<u>VMware</u>	<u>Citrix</u>	<u>RDP</u>	<u>Parallels RAS</u>
	4448v	4448c	4448r	4448p
Operating System	NOS™ (Zero)	NOS™ (Zero)	NOS™ (Zero)	NOS™ (Zero)
Memory (RAM)	Std: 2GB Max: 8GB	Std: 2GB Max: 8GB	Std: 2GB Max: 8GB	Std: 2GB Max: 8GB
VDI Broker Support	VMware Horizon (Blast Extreme, PCoIP, RDP)	Citrix XenApp & XenDesktop (HDX, HDX Premium)	RDP	Parallels RAS



Americas
EMEA
APAC
DE

P: +1 (866) 865-5250
P: +44 (0) 116 214 8650
P: +61 2 80027421
P: +49 (0) 6724 934 45

E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au
E: vertrieb@10zig.de

W: www.10ZiG.com

