

9948 Series Zero Clients *Ultra Power and Security Class*

Model Numbers: 9948v, 9948c, 9948m

Industry Leading Endpoints & Management for VDI

The 10ZiG 9900 Series offers features such as a CAC Card Reader that can provide SIPRNet support, making this device ideal for Federal and Military, as well as organizations in the private sector needing the highest levels of power and security for their VDI environment. The 9900 Series is equipped with connectivity for three monitors, 2x DisplayPort + 1x HDMI and support for single monitor at 4K UHD at 60Hz or multi-monitor at 4K UHD 30Hz. Equipped with free centralized management via The 10ZiG Manager™, which comes cloud-enabled with unlimited user licenses. Covered by a 3-Year Advance Warranty, technical support, and software upgrades. Also available in a Thin Client device.




- ▶ AMD RX-216GD Dual Core 1.6GHz (Turbo Frequency 3.0GHz)
- ▶ 2 x DisplayPorts (Optional 3rd DisplayPort) + 1 x HDMI
- ▶ 2 x DDR4 SO-DIMM Slots for support for up to 32GB
- ▶ 2 x USB Port 3.0, 6 x USB Port 2.0
- ▶ RJ45 LAN (Optional Fiber)
- ▶ Optional TAA
- ▶ Optional TPM 2.0
- ▶ Optional Wireless
- ▶ Support VESA Mount and Kensington Lock

9948 Series Zero Clients



System	
Management	The 10ZiG Manager™
Form Factor	Mini
Processor	AMD RX-216GD Dual Core 1.6GHz (Turbo Frequency 3.0GHz)
Dimensions	
Device	6.14" (D) x 2.36" (W) x 7.87" (H) in.
Weight	3.25 lbs. (1.47 kg.)
Connections	
Ports on Device	2 x DisplayPorts with a 3rd optional, 2 x USB Port 3.0, 6 x USB Port 2.0, 1 x HDMI, Choice of 1 x Fiber or 1 x LAN, 1 x DC Jack, 1 x COM, Optional Smart Card Reader, 1 x Mic-In, 1 x Line-Out
Video Resolution	Up to 3840 x 2160 (3 monitors at 4K UHD or 4 monitors at 4K UHD)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac External Antenna)
Ethernet	10/100/1000 Base-T, RJ45 LAN or Fiber Optional

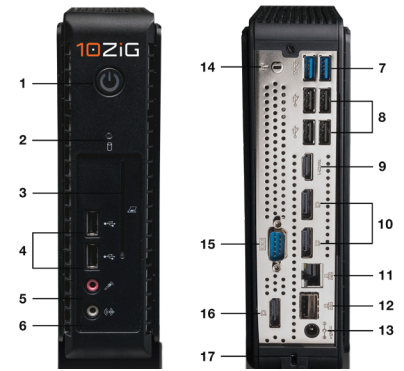

SPECIFICATIONS

- | | |
|-----------------------|---------------------------------|
| 1. Power Button | 11. RJ45 LAN / Fiber LAN |
| 2. Storage Active LED | 12. 12V DC |
| 3. SCR (Optional) | 13. External Antenna (Optional) |
| 4. USB 2.0 | 14. COM Port |
| 5. Mic-In | 15. DisplayPort (Optional) |
| 6. Line-Out | 16. Kensington Lock Slot |
| 7. USB 3.0 | |
| 8. USB 2.0 | |
| 9. HDMI | |
| 10. DisplayPort | |

	<u>VMware</u> 9948v	<u>Citrix</u> 9948c	<u>Microsoft</u> 9948m
Operating System	NOS™ (Zero)	NOS™ (Zero)	NOS™ (Zero)
Memory (RAM)	Std: 8GB Max: 32GB	Std: 8GB Max: 32GB	Std: 8GB Max: 32GB
Supported Protocols	Blast Extreme, PCoIP, RDP	Citrix ICA and EDT (HDX)	Windows Virtual Desktop, RDP
Connection Server	Horizon, Workspace One, Horizon Security Server, Unified Access Gateway	Storefront, Netscaler, Citrix Cloud	Direct RDP, RD Gateway, RD Load Balancer, RD Web

Note: 4K performance dependent upon your current VDI Infrastructure and the necessary minimum requirements to support it.



Americas	P: +1 (866) 865-5250	E: info@10ZiG.com
EMEA	P: +44 (0) 116 214 8650	E: info@10ZiG.eu
APAC	P: +61 2 80027421	E: info@10ZiG.com.au
DE	P: +49 (0) 6724 9304-45	E: vertrieb@10zig.de

W: www.10ZiG.com

