

### 6148 Series Zero Clients

Model Numbers: 6148v, 6148c, 6148m

### Industry Leading Endpoints & Management for VDI

The 10ZiG 6148 Series is a performance beast! Stylish, compact, and fanless, this power-user based endpoint kicks things into gear for your high-demand workers with DDR4 RAM (2 x SO-DIMM Slots), 8 USB ports, and 4-monitor support at 4K @ 60Hz display resolution. Supportive of VMware, Citrix, Microsoft, Amazon WorkSpaces, and more. Equipped with free centralized management via The 10ZiG Manager™, which comes cloud-enabled with unlimited user licenses. Covered by a 3-Year Advance Warranty, technical support, and software upgrades. Also available in a Thin Client device.




- ▶ AMD V1202B Dual Core 2.3GHz (3.2GHz Burst)
- ▶ 4 x DisplayPort (3840 x 2160), 4K @ 60Hz
- ▶ 2 x DDR4 RAM for High Speed Support
- ▶ 5 x USB Port 2.0, 2 x USB Port 3.0, 1 x USB Port Type C
- ▶ RJ45 LAN/Fiber LAN (SFP) Ready Options
- ▶ TAA Compliant
- ▶ Optional Wireless (Dual External Antenna)
- ▶ Supports VESA Mount and Kensington Lock
- ▶ FREE Centralized Management via The 10ZiG Manager™

# 6148 Series Zero Clients



System	
Management	The 10ZiG Manager™
Processor	AMD V1202B Dual Core 2.3GHz (3.2GHz Burst)
Processor Graphics	Radeon Vega 3
Dimensions	
Device	8.27" (D) x 2.09" (W) x 9.06" (H) in.
Weight	5.64 lbs. (2.56 kg.)
Connections	
Ports on Device	4 x DisplayPort, 5 x USB Port 2.0, 2 x USB Port 3.0, 1 x USB Port Type C, 1 x Smart Card Reader, 1 x Mic-In, 1 x Line-Out, 1 x DC Jack
Video Resolution	4 x (3840 x 2160) @ 60Hz (4 Monitors at 4K UHD)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac External Antenna)
Ethernet	10/100/1000 Base-T, RJ45 LAN or Fiber LAN (SFP) Optional
Environmental	
Operating Temp.	32° - 95°F (0° - 35°C), 20-80% non-condensing humidity

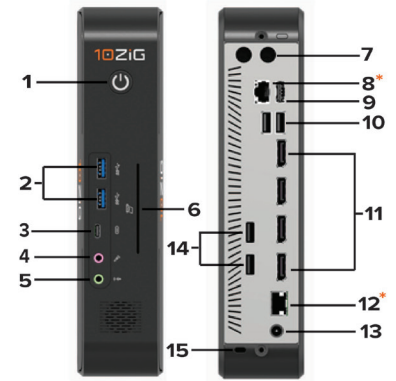

### SPECIFICATIONS

- 1. Power Button
- 2. USB 3.0
- 3. USB C
- 4. Mic-In
- 5. Line-Out
- 6. Smart Card Reader (Optional)
- 7. Antenna Holes
- 8. RJ45 LAN
- 9. USB 2.0
- 10. USB 2.0
- 11. DisplayPorts
- 12. Fiber LAN(Optional)
- 13. DC Jack
- 14. USB 2.0
- 15. Kensington Lock Slot

	<u>VMware</u> <b>6148v</b>	<u>Citrix</u> <b>6148c</b>	<u>Microsoft</u> <b>6148m</b>
Operating System	<b>NOS™ (Zero)</b>	<b>NOS™ (Zero)</b>	<b>NOS™ (Zero)</b>
Memory (RAM)	Std: 8GB Max: 32GB	Std: 8GB Max: 32GB	Std: 8GB Max: 32GB
Supported Protocols	Blast Extreme, PCoIP, RDP	Citrix ICA and EDT (HDX)	Azure Virtual Desktop (formerly Windows Virtual Desktop), RDP
Connection Server	Horizon, Workspace One, Horizon Security Server, Unified Access Gateway	Storefront, Netscaler, Citrix Cloud	Direct RDP, RD Gateway, RD Load Balancer, RD Web

Note: 4K performance dependent upon your current VDI Infrastructure and the necessary minimum requirements to support it.



Americas P: +1 (866) 865-5250 E: info@10ZiG.com  
 EMEA P: +44 (0) 116 214 8650 E: info@10ZiG.eu  
 APAC P: +61 2 80027421 E: info@10ZiG.com.au  
 DE P: +49 (0) 6724 9304-45 E: vertrieb@10zig.de

W: www.10ZiG.com

