

9900 Series Thin and Zero Clients *Ultra Power and Security Class*

Model Numbers: 9972, 9910, 9948

Industry Leading VDI Performance

The 10ZiG 9900 Series is a new, ground-breaking model to the 10ZiG product lineup. The 9900 model offers features such as Fiber and a CAC card reader that can provide SIPRNet support, making this Client ideal for Federal and Military, as well as organizations in the private sector needing the highest levels of power and security for their VDI environment. The 9900 Series is equipped with a standard support for three monitors all with 4K UHD at 60 Hz, 2 x DisplayPorts + 1 x HDMI, with the option for support of a fourth 4K UHD monitor and a 3rd DisplayPort.

The 9900 model is a fully loaded Client with 8 USB ports (2 x USB 3.0 and 6 x USB 2.0), 1 x COM Port, an impressive maximum 32GB RAM, the option for TAA compliance, and so much more.




▶ 3 Monitors all at 4K UHD or 4 Monitors all at 4K UHD
▶ Choice of 1 x Fiber Optic LAN or 1 x RJ-45 (10/100/1000Mbps Base-T)
▶ Optional Smart Card/CAC Reader
▶ AMD RX-216GD Dual-Core 1.6 GHz (Turbo Frequency 3 GHz)
▶ 2 x DDR4 SO-DIMM Slots for support for up to 32GB
▶ TAA Compliant Option
▶ 8 USB (2 x USB 3.0, 6 x USB 2.0)
▶ 2 x DisplayPorts (Optional 3 rd DisplayPort) + 1 x HDMI
▶ 1 x COM Port
▶ TPM 2.0 Optional
▶ Optional Wireless (External Antenna)
▶ FREE Centralized Management via 10ZiG Manager

9900 Series Thin and Zero Clients



System	
Management	10ZiG Manager
Form Factor	Mini
Processor	AMD RX-216GD Dual-Core 1.6 GHz (Turbo Frequency 3 GHz)
Dimensions	
Device	7.87" (H) x 2.36" (W) x 6.14" (D) 20cm x 6cm x 15.6cm
Weight	3.25 lbs. (1.47 kg.)
Connections	
Ports	Choice of 1 x Fiber or 1 x LAN, 2 x DisplayPorts with a 3rd optional, 1 x HDMI, 2 x USB 3.0, 6 x USB 2.0, 1 x DC Jack, 1 x COM, optional smart card reader, 1 x Mic In, 1 x Line Out
Video/Resolution	Up to 3840 x 2160 (3 monitors at 4K UHD or 4 monitors at 4K UHD)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac External Wireless Antenna)
Fiber OR Ethernet	1 x Fiber Optic LAN or 1 x RJ-45 (10/100/1000Mbps Base-T)

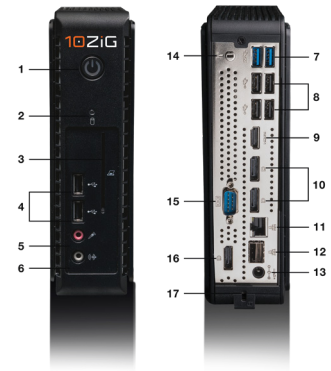

SPECIFICATIONS

- | | |
|-----------------------|---------------------------------|
| 1. Power Button | 10. DisplayPort |
| 2. Storage Active LED | 11. RJ45 LAN |
| 3. SCR (Optional) | 12. Fiber (Optional) |
| 4. USB 2.0 | 13. 12V DC |
| 5. Mic In | 14. External Antenna (Optional) |
| 6. Line Out | 15. COM Port |
| 7. USB 3.0 | 16. DisplayPort (Optional) |
| 8. USB 2.0 | 17. Kensington Lock |
| 9. HDMI | |

	9972 (soon to come!)	9910	9948
Operating System	PeakOS™ (Linux)	Windows 10 IoT	NOS™ (Zero)
Memory			
RAM	Std: 8GB Max: 32GB	Std: 8GB Max: 32GB	Std: 8GB Max: 32GB
Storage	Std: 16GB Max: 256GB	Std: 16GB MAX: 256GB	N/A
Software			
Software Applications	Firefox, Google Chrome*, Adobe Reader, Putty, Citrix Receiver, VMware Horizon Client, FreeRDP Client, Parallels Client, VNC (Shadowing), GStreamer, OpenOffice*, iSeries/5250 Emulation, JRE (Java Runtime Engine)	Internet Explorer, Citrix Receiver, RDP, VMware Horizon Client, VNC (Shadowing), Windows Media Player, Amazon WorkSpaces Client*, Parallels RAS Client, Spice Client, JRE (Java Runtime Engine), Microsoft Silverlight, Workspot Client	N/A
VDI Connection Brokers Supported	VMware Horizon View (Blast Extreme/PCoIP/RDP), Citrix XenApp & XenDesktop (HDX/HDX 3D Pro), RDP, Parallels RAS	VMware Horizon View (Blast Extreme/PCoIP/RDP), Citrix XenApp & XenDesktop (HDX/HDX 3D Pro), RDP, Parallels RAS, Workspot VDI, Amazon WorkSpaces (AWS)	VMware Horizon View (Blast Extreme, PCoIP, RDP) / Citrix XenApp & XenDesktop (HDX, HDX 3D Pro) / RDP / Parallels RAS **

*Denotes optional app
**Depends on Zero Client version



Americas	P: +1 (866) 865-5250	E: info@10ZiG.com	
EMEA	P: +44 (0) 116 214 8650	E: info@10ZiG.eu	W: www.10ZiG.com
APAC	P: +61 2 80027421	E: info@10ZiG.com.au	
DE	P: +49(0) 6724 934-45	E: vertrieb@10zig.de	

