

### V1200-QPD Zero Client Tera2 PCoIP® Portal Processor

Model Numbers: V1200-QPD, V1200-QPDF, V1200-QPDS

## Industry Leading Endpoint for VMware and Amazon Workspaces

The 10ZiG V1200-QPD is part of our V1200 Tera2 PCoIP® Zero Client Series optimized for VMware and Amazon WorkSpaces environments. With no operating system and no local storage, the V1200 Series line provides an ultra-secure, yet powerful and easy-to-manage endpoint that eliminates the chance of viruses and provides extensive USB security and authentication features. Options ranging from dual through quad screen, PoE, Fiber, 4 DisplayPort and Internal Smart Card (CAC) with up to 6 USB 2.0 ports as well as standard TAA Compliance.

The V1200-QPD model highlighted below supports quad screens and comes equipped with 4 x DisplayPort and 4 x USB 2.0, along with an optional Internal (CAC) Smart Card Reader and Fiber. All V1200 Series PCoIP® Zero Clients 10ZiG receive one year free of the Desktop Access Subscription. The Desktop Access Subscription includes the PCoIP Management Console with a subscription to firmware and security updates as well as tech support.

Internal (CAC) Smart Card Model


DisplayPort Model



- ▶ Tera2 PCoIP Portal Processor, Tera2140 PCoIP Chipset
- ▶ 4 x DisplayPort
- ▶ 4 x USB 2.0
- ▶ Optional Internal (CAC) Smart Card Reader
- ▶ Optional Fiber Support (SFP Ready)
- ▶ TAA Compliant
- ▶ Optional VESA Mount
- ▶ 1 year free of Desktop Access Subscription

# V1200-QPD Zero Client

## Tera2 PCoIP Zero Client Series

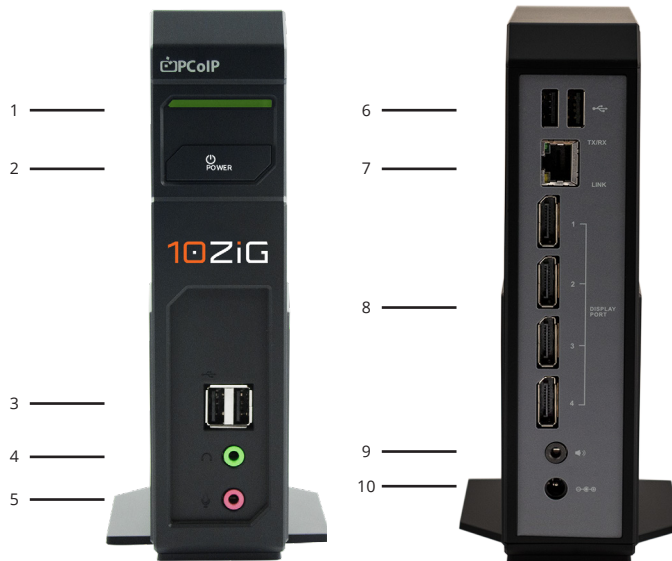

### SPECIFICATIONS

1. Power On Indicator Light
  2. Power Button
  3. USB 2.0 (2)
  4. Front Line Out
  5. Mic In
  6. USB 2.0 (2)
  7. RJ45 LAN Port (optional SFP Ready)
  8. DisplayPort (4)
  9. Rear Line Out
  10. DC Jack
- \* Kensington Lock on side

System Specifications	
Management Utility	PCoIP Management
Processor	PCoIP® Portal Processor - TERA2
Chipset	TERA2140 PCoIP®
Dimensions	
Device	5.22"(D) x 1.76"(W) x 7.21"(H) - 150mm x 130mm x 45mm
Weight	1.81 lbs (0.82 kg)
Connections	
Ports	4 x USB 2.0, 4 x DisplayPort, 1 x Mic In, 2 x Line Out, RJ-45 LAN, 1 x DC Jack
Video Resolution	2 x 3840 x 2160, 2 x 2560 x 1600 or 4 x 1920 x 1200
Networking	
Ethernet	10/100/1000 Base-T
Fiber	Optional SFP Fiber Connector (100/1000Mbps)
Environmental	
Operating Temp.	32-104F (0-40C), 10-90% non-condensing humidity
Power	12 Watts, DC-12V/3A External Power Adapter
Certifications	
CE, FCC, CAN ICES-3/NMB-3, VCCI, UL, TUV-GS, C-Tick, GOST, BSMI, RoHS	



Americas  
EMEA  
APAC  
DE

P: +1 (866) 865-5250  
P: +44 (0) 116 214 8650  
P: +61 2 80027421  
P: +49 (0) 6724 9304-45

E: info@10ZiG.com  
E: info@10ZiG.eu  
E: info@10ZiG.com.au  
E: vertrieb@10zig.de

W: www.10ZiG.com

