

7048q Series Zero Clients

Model Numbers: 7048qv, 7048qc, 7048qm

Industry Leading Endpoints & Management Software

The 10ZiG 7048q Series is a flexible, powerful Zero Client workhorse in the 10ZiG hardware lineup. A compact, durable, reliable, and fanless endpoint, the 7048q puts more speed into the Power, Speed, and Performance of 10ZiG and offers superior support for today’s modern workforces. Supportive of VMware, Citrix, Microsoft, and more. Equipped with free centralized management via 10ZiG Manager – cloud-enabled with unlimited user licenses. Covered by a 3-Year Advance Warranty, technical support, and software upgrades. Also available in a Thin Client device.



▶ Intel Quad Core 2.00GHz (2.60GHz Burst)
▶ 2 x DisplayPort (3840 x 2160), 4K @ 60Hz
▶ Up to 16GB DDR4 RAM for High-Speed Support
▶ 4 x USB Port 2.0, 2 x USB Port 3.2, 1 x USB Port C
▶ RJ45 LAN/Fiber (SFP) Ready Options
▶ Optional TPM 2.0*
▶ TAA Compliant
▶ Optional Wireless (Dual External Antenna)
▶ Supports VESA Mount and Kensington Lock
▶ FREE Centralized Management via 10ZiG Manager™

*Optional for W10 IoT only



Americas
EMEA
APAC
DE

P: +1 (866) 865-5250
P: +44 (0) 116 214 8650
P: +61 2 80027421
P: +49 (0) 6724 9304-45


E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au
E: vertrieb@10zig.de

W: www.10ZiG.com

7048q Series Zero Clients



System	
Management	10ZiG Manager™
Processor	Intel Quad Core 2.00GHz (2.60GHz Burst)
Processor Graphics	Intel HD Graphics
Dimensions	
Device	1.7" (D) x 6.0" (W) x 7.9" (H) in.
Weight	3.53 lbs. (1.6 kg.)
Connections	
Ports on Device	2 x DisplayPort, 2 x USB 3.2, 4 x USB 2.0, 1 x USB Port Type C, 1 x DC Jack, 1 x 3.5mm Headset Jack (TRRS)
Video Resolution	2 x (3840 x 2160) @ 60Hz (2 Monitors at 4K UHD)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac/ax External Antenna)
Ethernet	10/100/1000 Base-T, RJ45 LAN or Fiber LAN (SFP Optional)
Environmental	
Operating Temp.	32°-95°F (0°-35°C), 20-80% non-condensing humidity

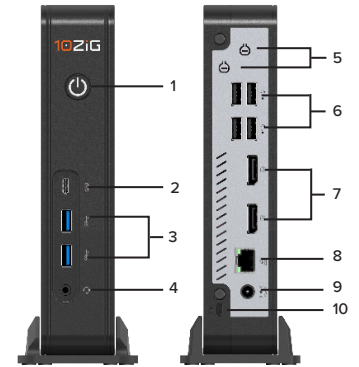

SPECIFICATIONS

1. Power Button/Power LED
2. USB Type C
3. USB 3.2
4. Headset Jack (TRRS)
5. Antenna Holes
6. USB 2.0
7. DisplayPorts
8. RJ45 LAN/Fiber LAN
9. 12V DC Jack
10. Kensington Lock Slot

	<u>VMware</u> 7048qv	<u>Citrix</u> 7048qc	<u>Microsoft</u> 7048qm
Operating System	NOS™ (Zero)	NOS™ (Zero)	NOS™ (Zero)
Memory (RAM)	Std: 8GB Max: 16GB	Std: 8GB Max: 16GB	Std: 8GB Max: 16GB
Supported Protocols	Blast Extreme, PCoIP, RDP	Citrix ICA and EDT (HDX)	Azure Virtual Desktop (AVD), Window 365, RDP
Connection Server	Horizon, Workspace One, Horizon Security Server, Unified Access Gateway (UAG)	Storefront, Netscaler, Citrix Cloud	AVD, Windows 365, Direct RDP, RD Gateway, RD Load Balancer, RD Web

Note: Actual display performance, such as multi-monitor and higher resolutions including 4K/UHD/QHD/WQHD are dependent upon your current VDI infrastructure and any additional requirements. Consult with 10ZiG for further guidance and model recommendation.



Americas
EMEA
APAC
DE

P: +1 (866) 865-5250
P: +44 (0) 116 214 8650
P: +61 2 80027421
P: +49 (0) 6724 9304-45

E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au
E: vertrieb@10zig.de

W: www.10ZiG.com

