

### 7100q Series Thin Clients

Model Numbers: 7172q, 7110q

### Industry Leading Endpoints & Management Software

The 10ZiG 7100q Series is a super strength Thin Client workhorse with quad 4K monitor output and maximum power for extreme VDI/DaaS use cases. A durable, reliable, yet small form factor endpoint, the 7100q running the latest AMD gen R2514 embedded processor puts more speed in the Power, Speed, and Performance of 10ZiG, and offers superior support for today’s modern workforces. Supportive of VMware, Citrix, Microsoft, Amazon WorkSpaces, and more. Equipped with free centralized management via 10ZiG Manager – cloud-enabled with unlimited user licenses. Covered by a 3-Year Advance Warranty, technical support, and software upgrades. Also available in a Zero Client device.



- ▶ AMD Ryzen Quad Core R2514 2.10GHz (3.70GHz Burst)
- ▶ 4 x DisplayPort (4096 x 2160), 4K @ 60Hz
- ▶ 2 SO-DIMM sockets, DDR4 RAM up to 32GB for High Speed Support
- ▶ 6 x USB Port 2.0, 2 x USB Port 3.2 Gen 2, 1 x USB Port C Gen 2
- ▶ RJ45 LAN/Fiber (SFP) Ready Options
- ▶ TPM 2.0
- ▶ TAA Compliant
- ▶ Optional Wireless (Dual External Antenna)
- ▶ Supports VESA and Kensington Lock
- ▶ FREE Centralized Management via 10ZiG Manager™

\*Optional for W10 IoT only



Americas  
EMEA  
APAC  
DE

P: +1 (866) 865-5250  
P: +44 (0) 116 214 8650  
P: +61 2 80027421  
P: +49 (0) 6724 9304-45


E: info@10ZiG.com  
E: info@10ZiG.eu  
E: info@10ZiG.com.au  
E: vertrieb@10zig.de

W: www.10ZiG.com

# 7100q Series Thin Clients



System	
Management	10ZiG Manager™
Processor	AMD Ryzen Quad Core R2514 2.10GHz (3.70GHz Burst)
Processor Graphics	Radeon Vega 8
Dimensions	
Device	8.27" (D) x 2.09" (W) x 9.06" (H) in.
Weight	5.64 lbs. (2.56 kg.)
Connections	
Ports on Device	6 x USB Port 2.0, 2 x USB Port 3.2 Gen 2, 1 x USB Port C Gen 2, 1 x DC Jack, 1 x 3.5mm Headset Jack (TRRS)
Video Resolution	4 x (4096 x 2160) @ 60Hz (4 Monitors at 4K UHD)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac/ax External Antenna)
Ethernet	10/100/1000 Base-T, RJ45 LAN or Fiber LAN (SFP Optional)
Environmental	
Operating Temp.	32°-95°F (0°-35°C), 20-80% non-condensing humidity

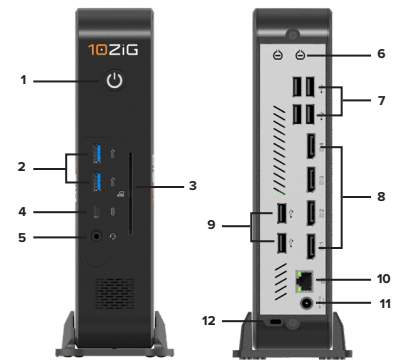

## SPECIFICATIONS

1. Power Button/Power LED
2. USB 3.2
3. Smart Card Reader Slot (Optional)
4. USB Type C
5. Audio Jack
6. Antenna Holes
7. USB 2.0
8. Display Ports
9. USB 2.0
10. RJ45 LAN (SFP Ready Fiber Optional)
11. 12V DC Jack
12. Kensington Lock

## Operating System

**7172q**  
PeakOS™ (Linux)

**7110q**  
Windows 10 IoT

Memory		
RAM	Std: 8GB Max: 32GB	Std: 8GB Max: 32GB
Storage	Std: 8GB Max: 256GB	Std: 32GB Max: 256GB
Software		

Software Applications	Citrix Workspace App, VMware Horizon Client, RD Client, FreeRDP Client, Parallels Client, Firefox, Google Chrome, Adobe Reader, Putty, VNC (Shadowing), iSeries/5250 Emulation, HP Anyware PCoIP Client, Frame Client	Citrix Workspace App, VMware Horizon Client, RD Client, RDP Client, Amazon Workspaces Client, Workspot Client, Parallels Client, Edge Browser, VNC (Shadowing), 10ZiG Quick Start & UWF Wizard, HP Anyware PCoIP Client, Frame Client
-----------------------	---	---

Connection Servers	Citrix: Citrix Storefront, Netscaler, Citrix Cloud, VMware: VMware Horizon, Workspace One, Horizon Security Server, Unified Access Gateway (UAG), RD Client: AVD, Windows 365 Cloud PC, FreeRDP: RDP, RD Gateway, RD Load Balancer, RD Web, Parallels Client: RAS, RDP, HP Anyware Client: Anyware (CAS), Amazon Workspaces, Frame Client	Citrix: Storefront, Netscaler, Citrix Cloud, VMware: VMware Horizon, Workspace One, Horizon Security Server, Unified Access Gateway (UAG), RD Client: AVD, Windows 365 Cloud PC, RDP Client: RDP, RD Gateway, RD Load Balancer, RD Web, Amazon Workspaces: Workspaces via PCoIP or WSP, Workspot Client: Workspot VDI via RDP, Parallels Client: RAS, RDP, HP Anyware Client: Anyware (CAS), Amazon Workspaces, Frame Client
--------------------	---	--

Note: Actual display performance, such as multi-monitor and higher resolutions including 4K/UHD/QHD/WQHD are dependent upon your current VDI infrastructure and any additional requirements. Consult with 10ZiG for further guidance and model recommendation.



Americas	P: +1 (866) 865-5250	E: info@10ZiG.com
EMEA	P: +44 (0) 116 214 8650	E: info@10ZiG.eu
APAC	P: +61 2 80027421	E: info@10ZiG.com.au
DE	P: +49 (0) 6724 9304-45	E: vertrieb@10zig.de

W: www.10ZiG.com

