

### 7148q Series Zero Clients

Model Numbers: 7148qv, 7148qc, 7148qm

### Industry Leading Endpoints & Management Software

The 10ZiG 7148q Series is a super strength Zero Client workhorse with quad 4K monitor output and maximum power for extreme VDI/DaaS use cases. A durable, reliable, yet small form factor endpoint, the 7148q running the latest AMD gen R2514 embedded processor puts more speed in the Power, Speed, and Performance of 10ZiG, and offers superior support for today’s modern workforces. Supportive of VMware, Citrix, Microsoft, Amazon WorkSpaces, and more. Equipped with free centralized management via 10ZiG Manager – cloud-enabled with unlimited user licenses. Covered by a 3-Year Advance Warranty, technical support, and software upgrades. Also available in a Thin Client device.



- ▶ AMD Ryzen Quad Core R2514 2.10GHz (3.70GHz Burst)
- ▶ 4 x DisplayPort (4096 x 2160), 4K @ 60Hz
- ▶ 2 SO-DIMM sockets, DDR4 RAM up to 32GB for High Speed Support
- ▶ 6 x USB Port 2.0, 2 x USB Port 3.2 Gen 2, 1 x USB Port C Gen 2
- ▶ RJ45 LAN/Fiber (SFP) Ready Options
- ▶ TPM 2.0
- ▶ TAA Compliant
- ▶ Optional Wireless (Dual External Antenna)
- ▶ Supports VESA Mount and Kensington Lock
- ▶ FREE Centralized Management via 10ZiG Manager™

\*Optional for W10 IoT only



Americas  
EMEA  
APAC  
DE

P: +1 (866) 865-5250  
P: +44 (0) 116 214 8650  
P: +61 2 80027421  
P: +49 (0) 6724 9304-45


E: info@10ZiG.com  
E: info@10ZiG.eu  
E: info@10ZiG.com.au  
E: vertrieb@10zig.de

W: www.10ZiG.com

# 7148q Series Zero Clients



System	
Management	10ZiG Manager™
Processor	AMD Ryzen Quad Core R2514 2.10GHz (3.70GHz Burst)
Processor Graphics	Radeon Vega 8
Dimensions	
Device	8.27" (D) x 2.09" (W) x 9.06" (H) in.
Weight	5.64 lbs. (2.56 kg.)
Connections	
Ports on Device	6 x USB Port 2.0, 2 x USB Port 3.2 Gen 2, 1 x USB Port C Gen 2, 1 x DC Jack, 1 x 3.5mm Headset Jack (TRRS)
Video Resolution	4 x (4096 x 2160) @ 60Hz (4 Monitors at 4K UHD)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac/ax External Antenna)
Ethernet	10/100/1000 Base-T, RJ45 LAN
Environmental	
Operating Temp.	32°-95°F (0°-35°C), 20-80% non-condensing humidity

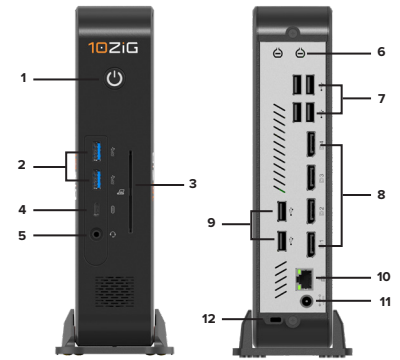

### SPECIFICATIONS

1. Power Button/Power LED
2. USB 3.2
3. Smart Card Reader Slot (Optional)
4. USB Type C
5. Audio Jack
6. Antenna Holes
7. USB 2.0
8. Display Ports
9. USB 2.0
10. RJ45 LAN (SFP Ready Fiber Optional)
11. 12V DC Jack
12. Kensington Lock

	<u>VMware</u> <b>7148qv</b>	<u>Citrix</u> <b>7148qc</b>	<u>Microsoft</u> <b>7148qm</b>
<b>Operating System</b>	<b>NOS™ (Zero)</b>	<b>NOS™ (Zero)</b>	<b>NOS™ (Zero)</b>
<b>Memory (RAM)</b>	Std: 8GB Max: 32GB	Std: 8GB Max: 32GB	Std: 8GB Max: 32GB
<b>Supported Protocols</b>	Blast Extreme, PCoIP, RDP	Citrix ICA and EDT (HDX)	Azure Virtual Desktop (AVD), Window 365, RDP
<b>Connection Server</b>	Horizon, Workspace One, Horizon Security Server, Unified Access Gateway (UAG)	Storefront, Netscaler, Citrix Cloud	AVD, Windows 365, Direct RDP, RD Gateway, RD Load Balancer, RD Web

Note: Actual display performance, such as multi-monitor and higher resolutions including 4K/UHD/QHD/WQHD are dependent upon your current VDI infrastructure and any additional requirements. Consult with 10ZiG for further guidance and model recommendation.



Americas  
EMEA  
APAC  
DE

P: +1 (866) 865-5250  
P: +44 (0) 116 214 8650  
P: +61 2 80027421  
P: +49 (0) 6724 9304-45

E: info@10ZiG.com  
E: info@10ZiG.eu  
E: info@10ZiG.com.au  
E: vertrieb@10zig.de

W: www.10ZiG.com

