

10ZiG®

7948q Series Zero Clients



Model Numbers: 7948qo, 7948qc, 7948qm

Industry Leading Secure Endpoint Solutions

The 10ZiG 7948q AIO Zero Client Series is truly an All-in-One with 5M webcam and dual digital microphone, 23.8" Full HD, frameless bezel design display with LED backlight panel, two external up-to-4K display monitor support, and more. Its impressive foot stand tilts from -5 to 20 degrees and swivels -65 to 65 degrees. Equipped with free centralized management via The 10ZiG Manager™, which comes cloud-enabled with unlimited user licenses. Covered by technical support and software upgrades. Also available in a Thin Client device.



	Intel N5100 Quad Core 1.1GHz (2.8GHz Burst)
	AIO Monitor (1920 x 1080), 2 x External Monitors Support ((1x (1920 x 1080) DVI-D & 1x (3840 x 2160) @60Hz DP))
	Up to 16GB DDR4 RAM for High Speed Support and 256GB Storage
	2 x USB-3.2, 2 x USB 2.0, 1 x DP, 1 x DVI-D, 1 x 3.5mm Headset Jack
	RJ45 LAN
	TAA Compliant*
	Optional Wireless (Dual External Antenna)
	Supports VESA Mounting and Kensington Lock*
	FREE Centralized Management via 10ZiG Manager™

*VESA Mounting Bracket required and sold separately

Amazon Workspaces | Apporto | Azure Virtual Desktop | Citrix | ControlUp | Dizzion Frame | Everfox | FabulaTech | HP Anyware | Inuvika | Imprivata | Leostream | Liquidware | Microsoft (AVD / RDS / W365) | Nerdio | Nutanix | Omnisia | Parallels | 90Meter

Americas
EMEA
APAC
DE

P: +1 (866) 865-5250
P: +44 (0) 116 214 8650
P: +61 2 80027421
P: +49 (0) 6724 9304 45


E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au
E: vertrieb@10ZiG.de

www.10ZiG.com

7948q Series

Zero Clients

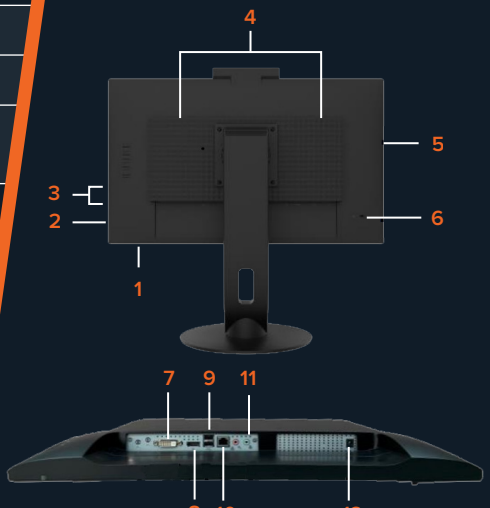

System		Specifications	
Management	10ZiG Manager™		
Processor	Intel N5100 Quad Core 1.1GHz (2.8GHz Burst)		
Processor Graphics	Intel HD Graphics for Intel® Celeron® Processor N3000 Series		
Dimensions			
Device	13.5" (W) x 21" (H) x 1.9" (D) (w/o stand)		
Weight	9.9 lbs. (4.5 kg.)		
Connections			
Ports on Device	2 x DisplayPort, 2 x USB-3.2, 2 x USB 2.0, 1 x DP, 1 x DVI-D, 1 x 3.5mm Headset Jack		
Video Resolution	AIO Monitor (1920 x 1080), 2 x External Monitors Support ((1x (1920 x 1080) DVI-D & 1x (3840 x 2160) @60Hz DP))		
Networking			
Wireless	Optional (802.11 a/b/g/n/ac/ax External Antenna)		
Ethernet	10/100/1000 Base-T, RJ45 LAN		
Environmental			
Operating Temp	32°-95°F (0°-35°C)		

1. Power LED
2. Power Button
3. OSD Control Button
4. Speaker
5. 2 x USB Port Type 3.0
6. Kensington Lock
7. DVI-D
8. DisplayPort
9. 2 x USB Port Type 2.0
10. RJ45 LAN
11. Antenna Hole
12. 19V DC Jack

Operating System	7948qo Omniissa NOS™ (Zero)	7948qc Citrix NOS™ (Zero)	7948qm Microsoft NOS™ (Zero)
Memory (RAM)	Std: 4GB Max: 16GB	Std: 4GB Max: 16GB	Std: 4GB Max: 16GB
Supported Protocols	Blast Extreme, PCoIP, RDP	Citrix ICA, Citrix EDT (HDX)	Azure Virtual Desktop (AVD), RDP, Windows 365
Connection Servers	Horizon, Horizon Security Server, Unified Access Gateway (UAG), Workspace One	Citrix Cloud, Citrix Storefront, Netscaler	Azure Virtual Desktop (AVD), Direct RDP, RD Gateway, RD Load Balancer, RD Web, Windows 365