

10ZiG®

7348q Series

Modernized Zero Clients

Model Numbers: 7348qo, 7348qc, 7348qm

Industry Leading Secure Endpoint Solutions

The 7348q is a high-performing 10ZiG Zero Client Series with our most flexible display capable output options for today's modern workforce. Specifically, 2x HDMI at 4K and 1x USB-C (Alt-DP) output. The USB-C (Alt-DP) output can be used with Alt-DP compatible monitors supporting up to 4K 60HZ output for streamlined connectivity and superior service with the likes of Omnisia, Citrix, Microsoft, Amazon WorkSpaces, and more. Also available optionally is **PoE for providing additional flexibility and single cabling for transmitting power & data in one. Equipped with free centralized management via 10ZiG Manager – cloud-enabled with unlimited user licenses. Covered by a 3-Year Warranty, technical support, and software upgrades. **Also available in a Thin Client device.**



	Intel N100 Quad-Core up to 3.40GHz
	2 + 1 (2 x HDMI + 1 USB-C Alt DP) up to (3840 x 2160 @ 60Hz) at 4KUHD*
	Up to 16GB RAM and 256GB Storage
	2 x USB 2.0, 2 x USB-A 3.2 Gen 1, 1 x USB-C 3.2 Gen 2 (Alt-DP)
	RJ45 LAN/Fiber (SFP) Ready/PoE** Options
	TAA Compliant
	Optional Wireless (Dual External Antenna)
	Supports VESA Mounting and Kensington Lock***
	FREE Centralized Management via 10ZiG Manager™

**PoE+ (802.3at) switch or higher required

***VESA Mounting Bracket required and sold separately

Amazon Workspaces | Apporto | Azure Virtual Desktop | Citrix | ControlUp | Dizzion Frame | FabulaTech |
Inuvika | Imprivata | Leostream | Liquidware | Microsoft (AVD / RDS / W365) | Nerdio | Nutanix | Omnisia | Parallels | 90Meter

Americas
EMEA
APAC
DE

P: +1 (866) 865-5250
P: +44 (0) 116 214 8650
P: +61 1300 768 779
P: +49 (421) 80713790


E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au
E: vertrieb@10ZiG.de

www.10ZiG.com

7348q Series

Modernized Zero Clients

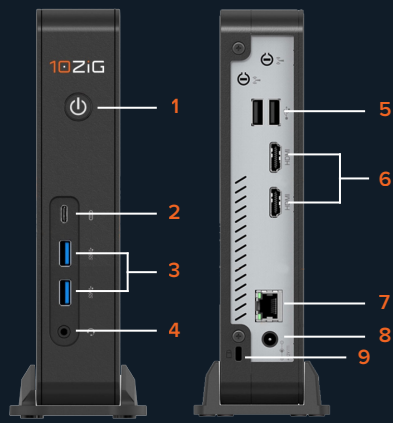

System		Specifications	
Management	10ZiG Manager™		
Processor	Intel N100 Quad-Core up to 3.40GHz		
Processor Graphics	Intel HD Graphics		
Dimensions			
Device	1.7" (D) x 6.1" (W) x 8" (H) in.		
Weight	3.31 lbs. (1.5 kg.)	1. Power Button/Power LED 2. USB-C 3.2 Gen2 3. USB-A 3.2 Gen1 4. Headset Jack (TRRS) 5. USB 2.0 6. HDMI 7. RJ45 LAN/Fiber LAN (SFP) Ready Options 8. 12V DC Jack 9. Kensington Lock Slot	
Connections			
Ports on Device	2 + 1 (2 x HDMI + 1 USB-C Alt DP), 2 x USB 2.0, 2 x USB-A 3.2 Gen 1, 1 x USB-C 3.2 Gen 2 (Alt-DP), 1 x DC Jack, 1 x 3.5mm Headset Jack (TRRS)		
Video Resolution	2 + 1 (2 x HDMI + 1 USB-C Alt DP) up to (4096 x 2160 @ 60Hz) at 4KUHD*		
Networking			
Wireless	Optional (802.11 a/b/g/n/ac/ax External Antenna)		
Ethernet	10/100/1000 Base-T, RJ45 LAN or Fiber LAN (SFP) Ready Options		
Environmental			
Operating Temp	32°-95°F (0°-35°C), 20-80% non-condensing humidity		

*Note: USB-C Gen 2 (Alt-DP) supports max 1x 4K 60HZ monitor. Actual display performance, such as multi-monitor and higher resolutions including 4K/UHD/QHD/WQHD are dependent upon your current VDI infrastructure and any additional requirements. Consult with 10ZiG for further guidance and model recommendation.

Operating System	7348qo Omniissa NOS™ (Zero)	7348qc Citrix NOS™ (Zero)	7348qm Microsoft NOS™ (Zero)
Memory (RAM)	Std: 8GB Max: 16GB	Std: 8GB Max: 16GB	Std: 8GB Max: 16GB
Supported Protocols	Blast Extreme, PCoIP, RDP	Citrix ICA, Citrix EDT (HDX)	Azure Virtual Desktop (AVD), RDP, Windows 365
Connection Servers	Horizon, Horizon Security Server, Unified Access Gateway (UAG), Workspace One	Citrix Cloud, Citrix Storefront, Netscaler	Azure Virtual Desktop (AVD), Direct RDP, RD Gateway, RD Load Balancer, RD Web, Windows 365